



Push Plate Controls

D106 Series

F106 Series

L106 Series

T106 Series

T108 Series

S106 Series

C3767 Series

Key Switches

142-RBKR Series

3640-73 Series

H241 Series

Push Buttons

114 Series

126 Series

130 Series

142-xLOC Series

H148 Series

Visual LED Indicators

326 Series

Push Plate Controls and Exit Releases

D106 SERIES




D106A-RDWHECE



D106A-BLWHECE


D106 SERIES Push Plate Control Assemblies consist of Wide Push Plate on 2-gang box mount recessed Back Plate with concealed preassembled socket head mounting screws for flush wall mounting.

Ordering Information

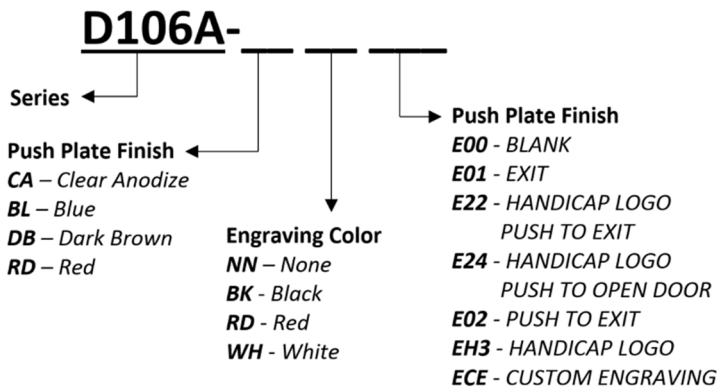

Specification

CONTACT RATING:	6 Amps @ 125VAC/28VDC
Switch Type:	SPDT-Momentary Switch (Standard) Alternative switch available
DIMENSIONS:	Back Plate 4.50"(114.3) x 4.625"(117.5) Wide Push Plate 4.00"(101.6) x 4.00"(101.6)
MATERIAL:	Aluminum
FINISH:	Clear anodized aluminum (standard)

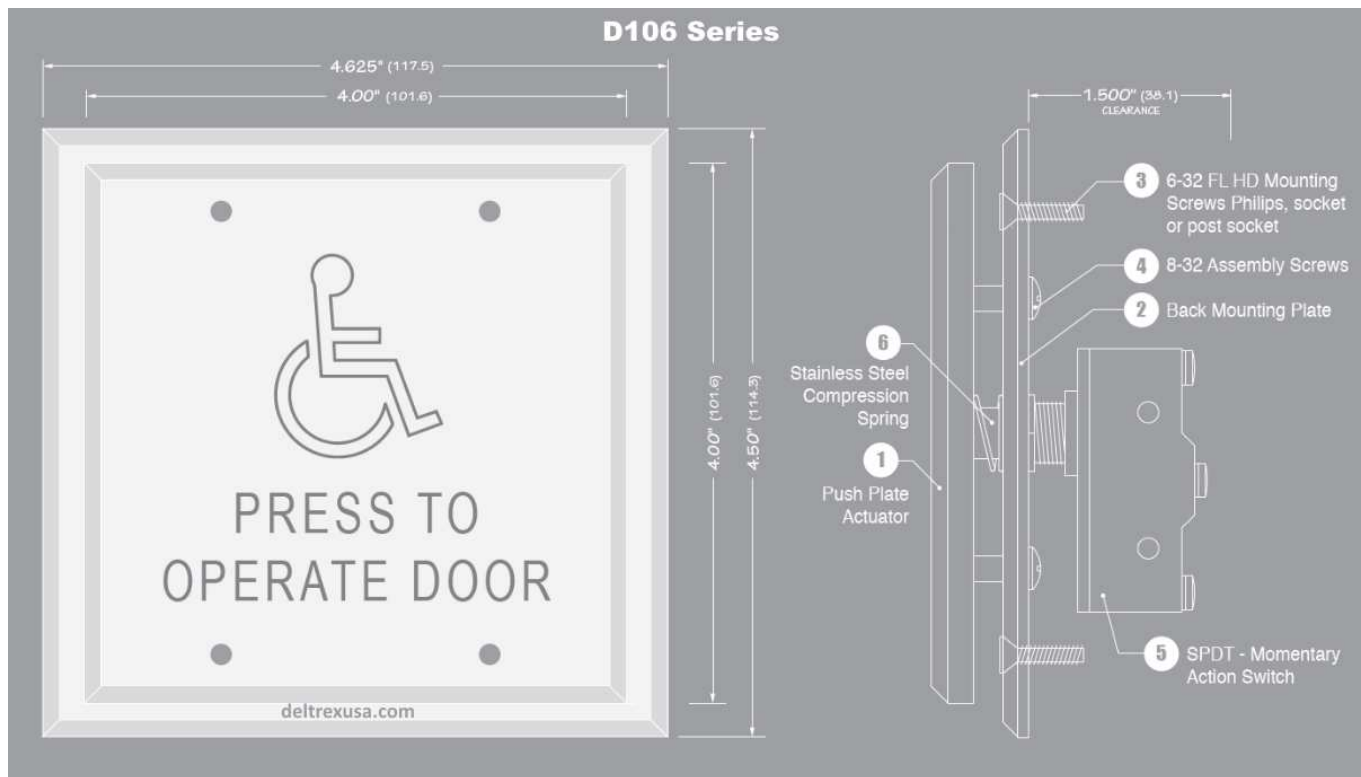

Push Plate Controls and Exit Releases


F106 SERIES



F106 SERIES Push Plate Control Assemblies consist of wide Push Plate on 1-gang box mount recessed Back Plate with concealed preassembled socket head mounting screws for flush wall mounting. An impact resilient SPDT-Momentary switch is furnished standard. Alternate switches are available


F106A-BLWHECE F106A-CABKECE

Ordering Information

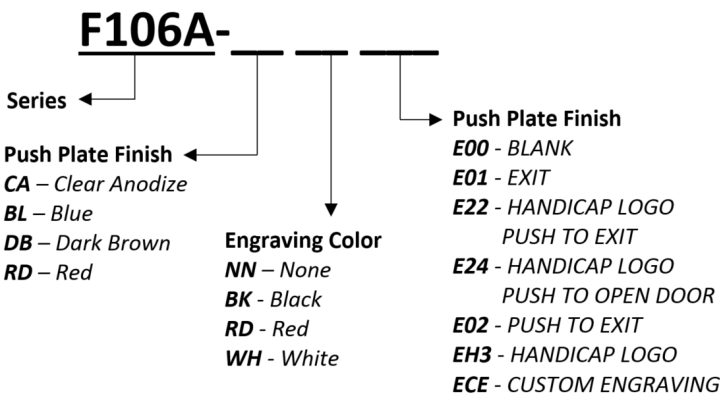

Specification

CONTACT RATING:	6 Amps @ 125VAC/28VDC
SWITCH TYPE:	SPDT-Momentary Switch (Standard)
DIMENSIONS:	Back Plate 3.00"(76.2) x 4.50"(114.3) Wide Push Plate 2.5"(63.5) x 4.00"(101.6)
MATERIAL:	Aluminum
FINISH:	Clear satin anodized aluminum (standard)

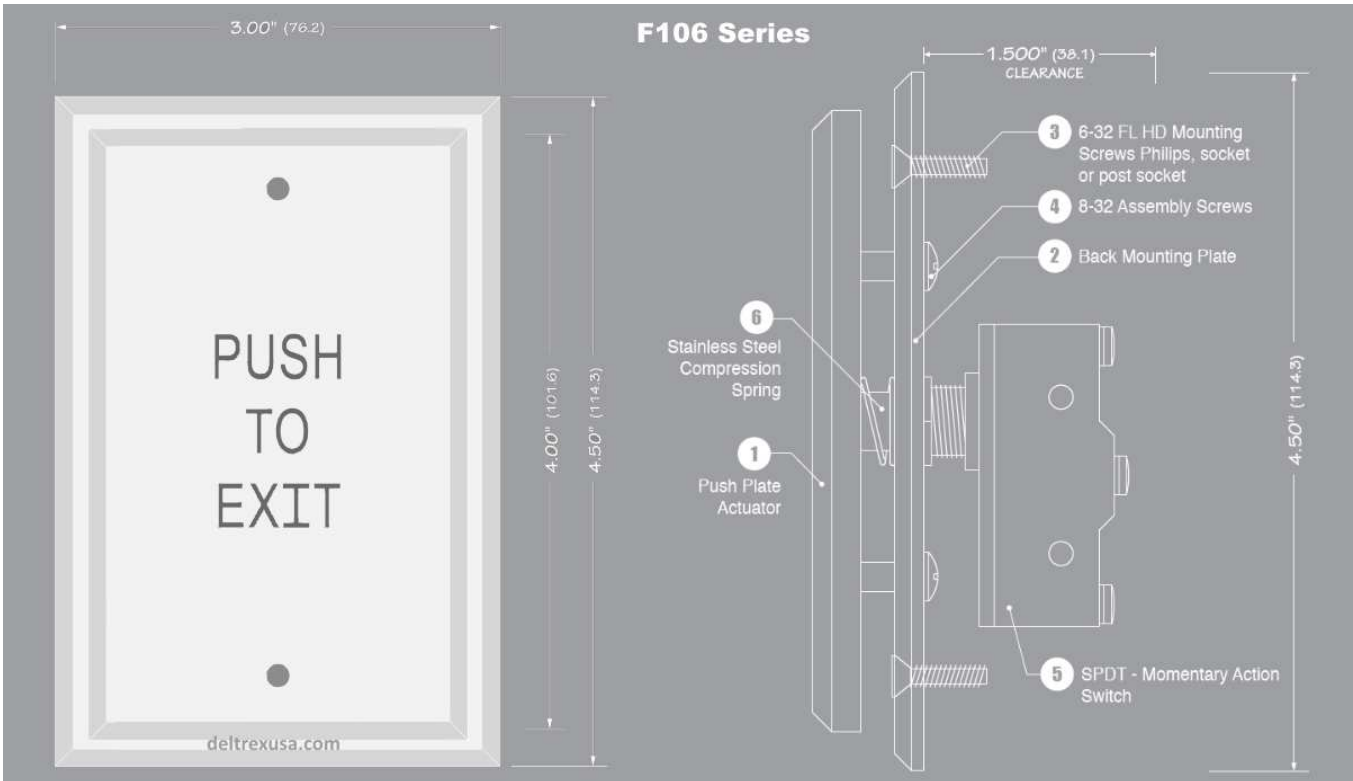

Push Plate Controls and Exit Releases

L106 Series



L106-CABKE02 L106-BLWHECE L106A-CANNECE

Ordering Information


L106A-

Series	Push Plate Finish	Engraving Color	Push Plate Finish
CA – Clear Anodize	CA – Clear Anodize	NN – None	E00 – BLANK
BL – Blue	BL – Blue	BK – Black	E01 – EXIT
DB – Dark Brown	DB – Dark Brown	RD – Red	E22 – HANDICAP LOGO PUSH TO EXIT
RD – Red	RD – Red	WH – White	E24 – HANDICAP LOGO PUSH TO OPEN DOOR
			E02 – PUSH TO EXIT
			EH3 – HANDICAP LOGO
			ECE – CUSTOM ENGRAVING

L106 SERIES Push Plate Control Assemblies consist of Long, Narrow Push Plate on 2-gang box mount recessed Back Plate with concealed preassembled socket head mounting screws for attaching to door frame or mullion. Push plate and back plate are both clear satin anodized aluminum unless otherwise specified. An impact resilient SPDT-Momentary switch is furnished standard. Alternate switches are available.

Specification

CONTACT RATING:	6 Amps @ 125VAC/28VDC
Switch Type:	SPDT-Momentary Switch (Standard)
DIMENSIONS:	Back Plate 6.375"(161.9) x 1.75"(44.5) Long Narrow Push Plate 5.875"(149.2) x 1.50"(38.1)
MATERIAL:	Aluminum
FINISH:	Clear anodized aluminum (standard)

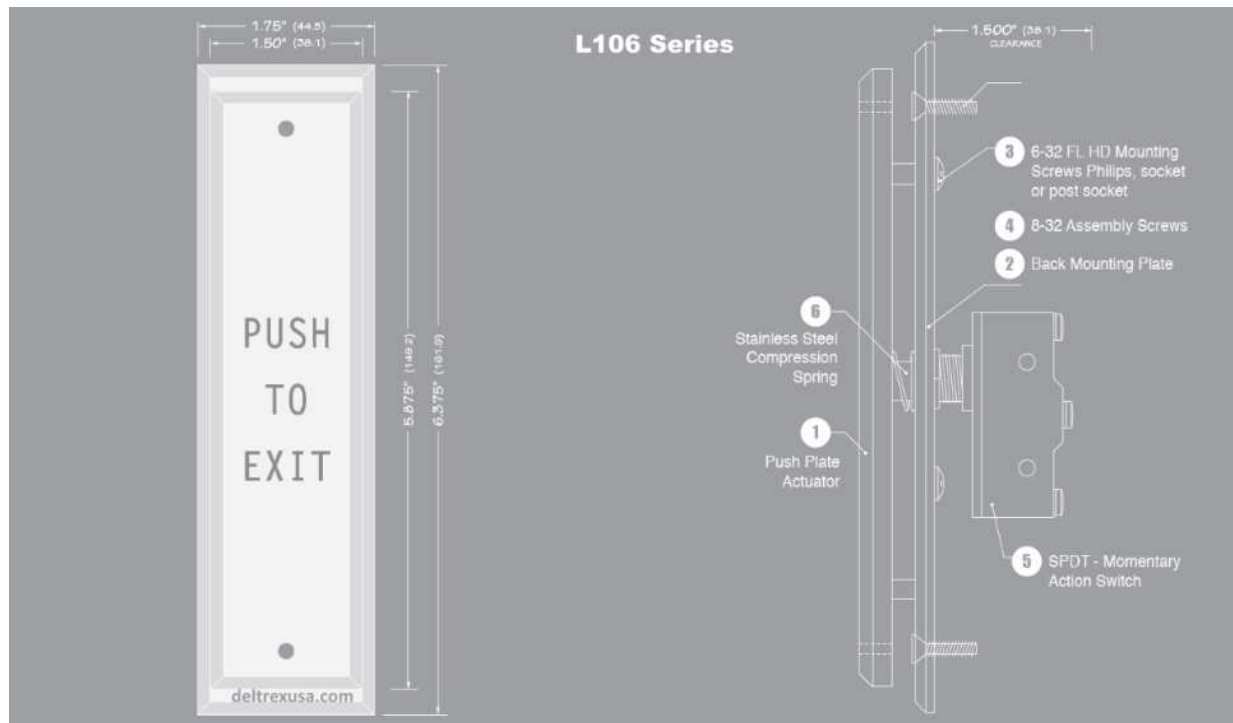

Push Plate Controls and Exit Releases

T106 SERIES




T106A-CABKE02




T106A-BLWHE24

Ordering Information

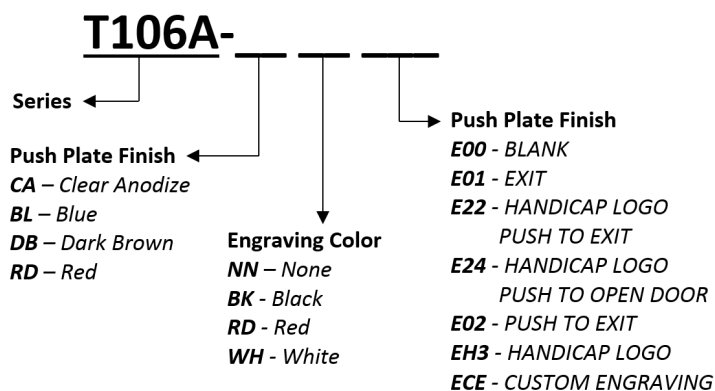

Specification

CONTACT RATING:	6 Amps @ 125VAC/28VDC
Switch Type:	SPDT-Momentary Switch (Standard)
DIMENSIONS:	Back Plate 3.00"(76.2) x 4.50"(114.3) Narrow Push Plate 1.5"(38.1) x 4.00"(101.6)
MATERIAL:	Aluminum
FINISH:	Clear satin anodized aluminum (standard)

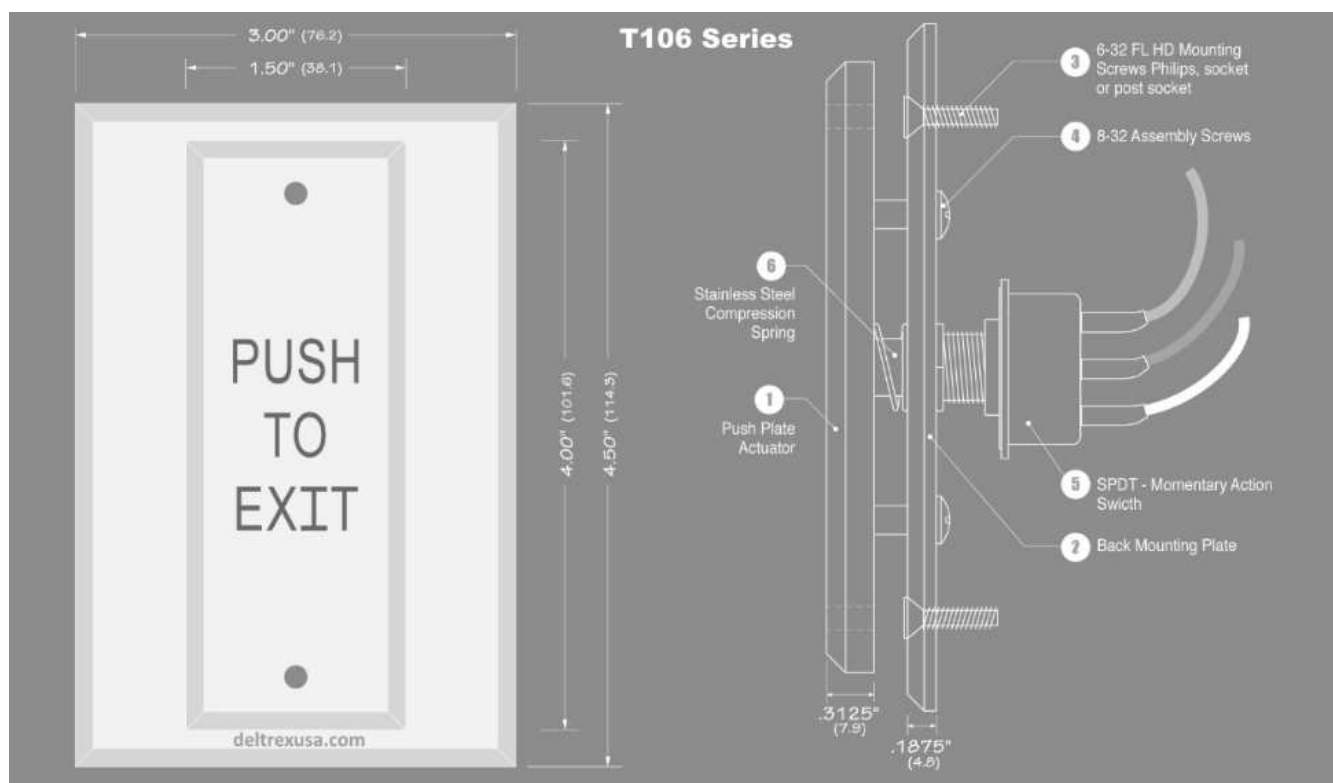

Push Plate Controls and Exit Releases


T108 SERIES



T108 SERIES Push Plate Control Assemblies consist of two narrow Push Plates on 2-gang box mount recessed Back Plate with concealed preassembled socket head mounting screws for flush wall mounting. Engraved plates to suit.


T108A-CACABKBKECEECE T108A-CACABKBKECEECE

Ordering Information

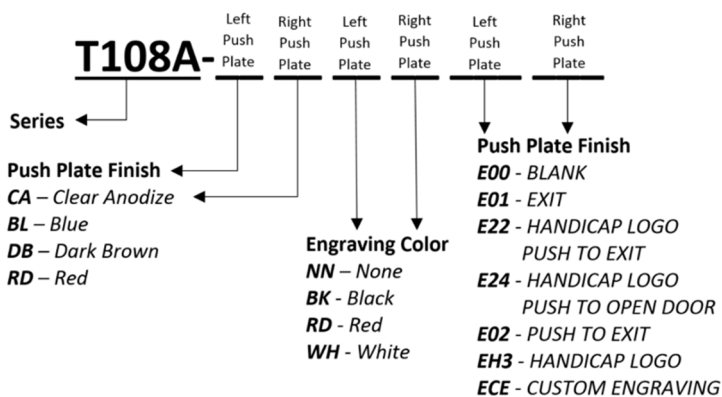

Specification

CONTACT RATING:	6 Amps @ 125VAC/28VDC
Switch Type:	SPDT-Momentary Switch (Standard)
DIMENSIONS:	Back Plate 4.625"(117.5) x 4.50"(114.3) Narrow Push Plate 1.5"(38.1) x 4.00"(101.6)
MATERIAL:	Aluminum
FINISH:	Clear satin anodized aluminum(standard)

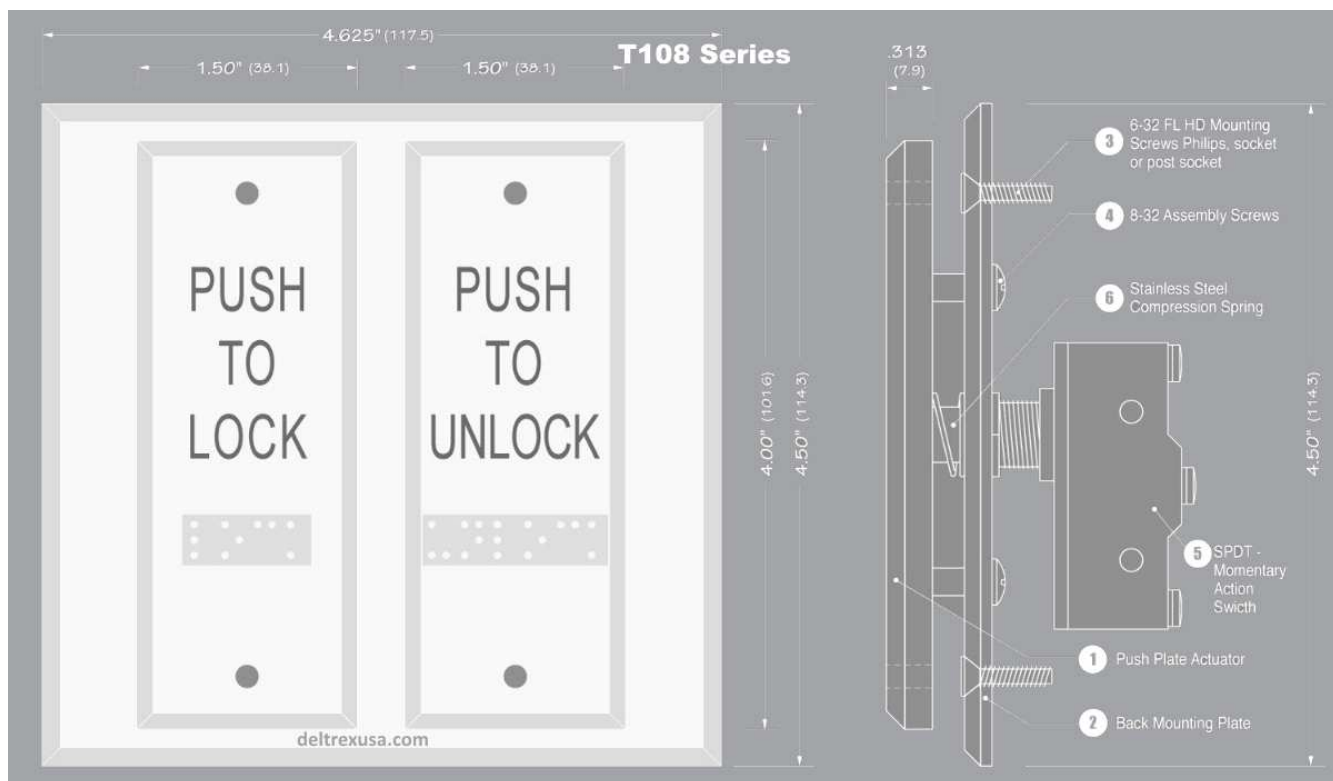

Push Plate Controls and Exit Releases

C3767 Series




C3767A-RDWH40ECE



C3767A-RDWH40ECE


C3767 Series Fail-Safe Emergency Exit Release. Push Plate Control Assemblies consist of wide Push Plate on recessed Back Plate with Sounder and Red Power "ON" LED.

Ordering Information

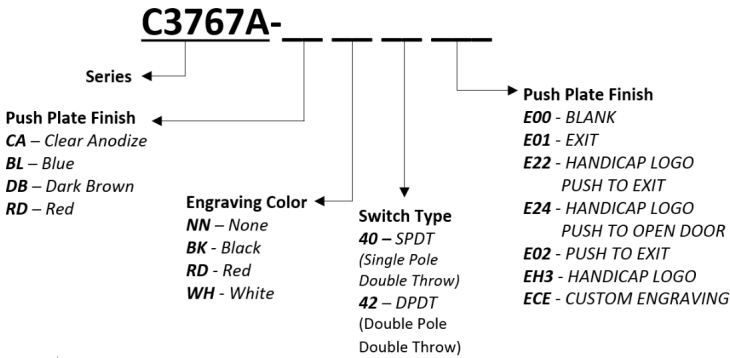

Specification

CONTACT RATING:	3 Amps @ 12VAC/DC
DIMENSIONS:	Wide Push Plate 2.00"(50.8) x 4.00"(101.6) Back Plate 4.625"(117.5) x 4.50"(114.3)
MATERIAL:	Aluminum
FINISH:	Clear satin anodized aluminum (Back Plate)
CONTINUOUS DUTY BUZZER:	16-28VDC operating range. Sound output 85dB @ 30 cm (Standard)

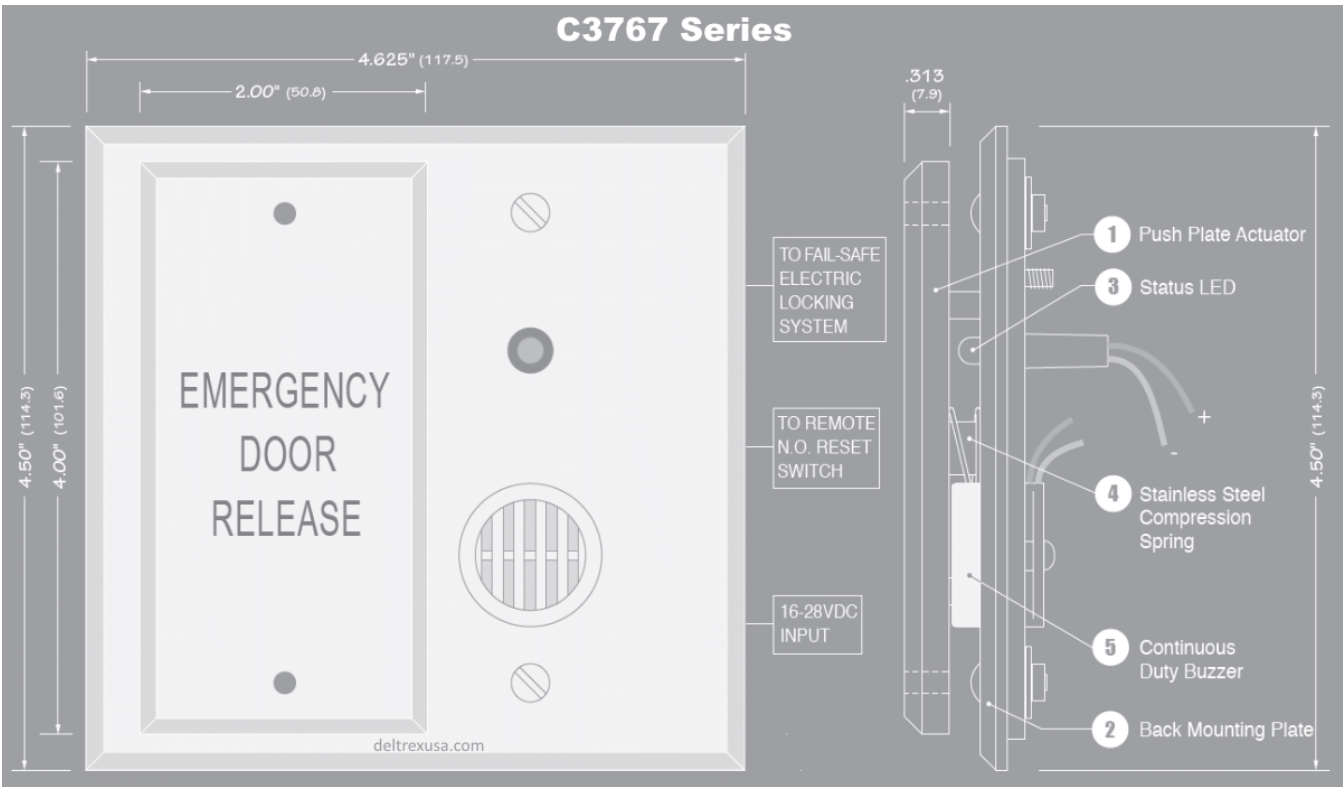

Push Plate Controls and Exit Releases

142-RBKR SERIES




142-RBKR22ECE

142-RBKR SERIES Emergency Self-Latching Red Push Button Control with Internal Key Release. Button latches "IN" when pushed, changing contact mode status. Turning key momentary left release button, returning contacts to normal mode status.

Ordering Information

142-RBKR

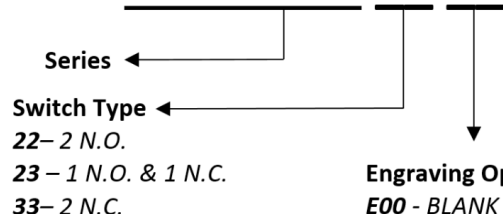

Engraving Option

E00 - BLANK

E01 - EXIT


E02 - PUSH TO EXIT

E99 - EMERGENCY RELEASE

ECE - CUSTOM ENGRAVING

Specification

CONTACT RATING:	4 Amps @ 24VDC 6 Amps @ 120VAC
DIMENSIONS:	2.75"(69.9) x 4.50"(114.3)
MATERIAL:	Switch plate .060 stainless 302
FINISH:	Satin chrome (standard)

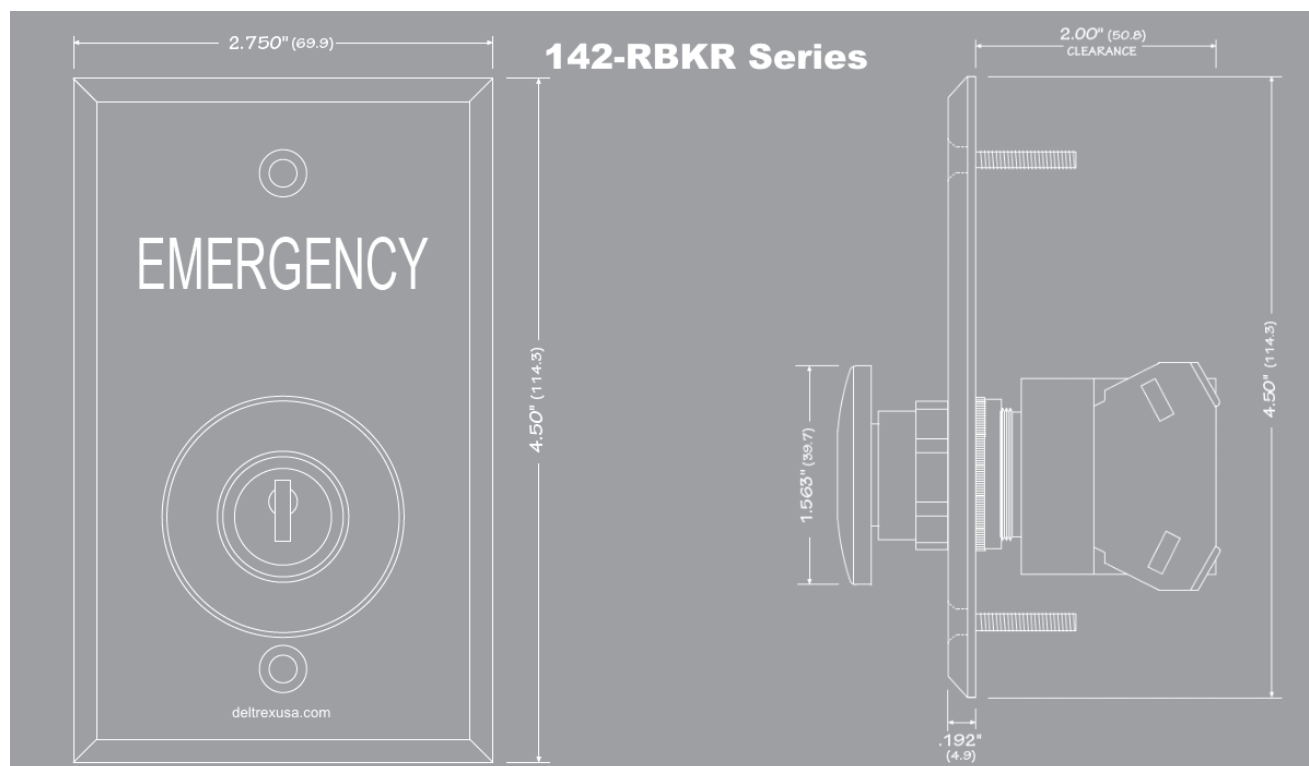

Door Violation Alarm Keyswitch 3640-73 SERIES



3640- 73 SERIES Door violation alarm with loud sounder, status LEDs mortise cylinder keyswitch to arm/disarm and reset & bell cylinder shunt switch.

Specification


Ordering Information

Model

3640- 73 Red and green colored LEDs loud sounder, reset & bell cylinder shunt switch

3640-73xMC Red and green colored LEDs, loud sounder reset & bell cylinder stunt switch. Factory installed mortise cylinder.

CONTACT RATING:	2 Amps @ 24VAC
DIMENSIONS:	6.375" (161.9) x4.50" (114.3)
MATERIAL:	Switch plate .060 stainless 302
FINISH:	Satin chrome (standard)
*** Mortise cylinder not included.	

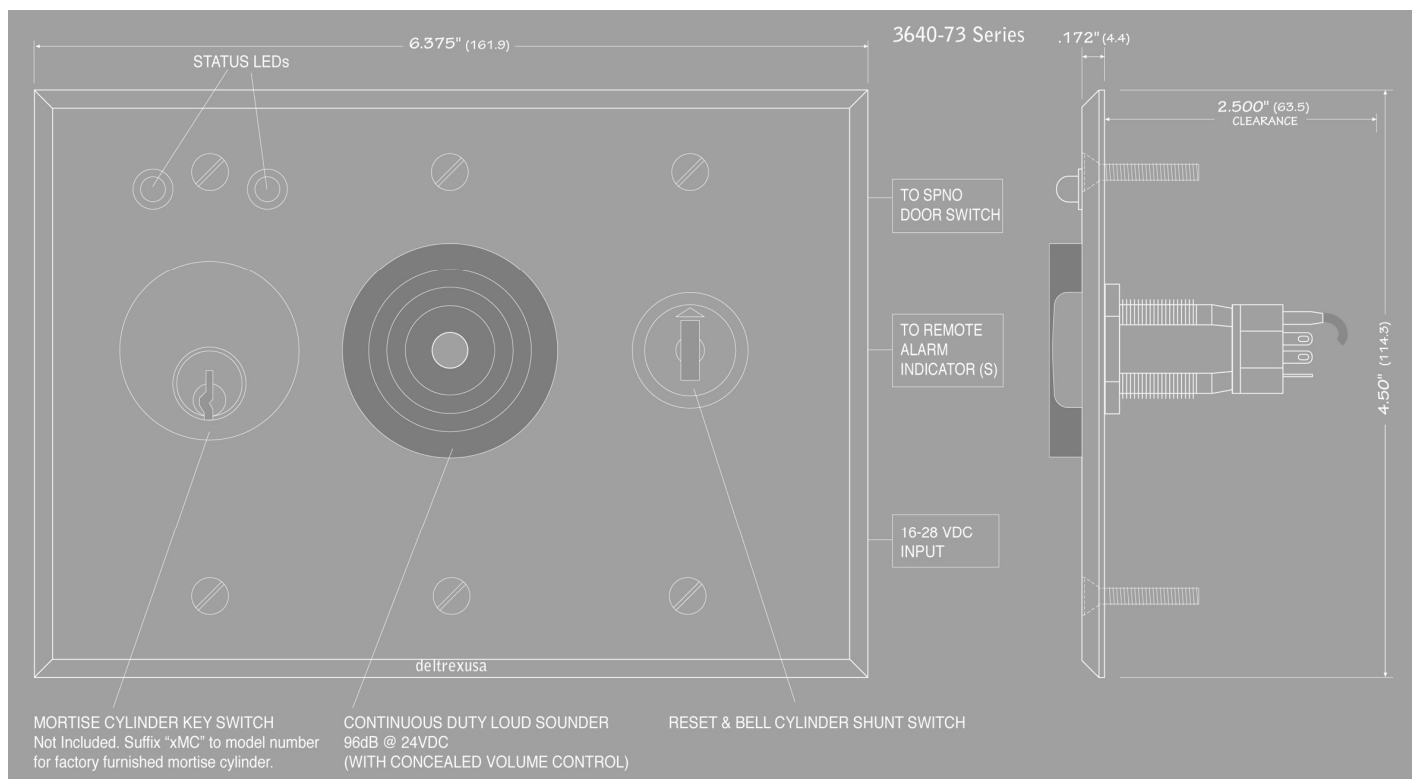

Heavy Duty Mortise Cylinder Keyswitch

H241 Series





H241 SERIES Heavy Duty Mortise Cylinder Key Switches are designed for high frequency and restricted area usage. They are operated by a standard 1-1/4" mortise cylinder, which included when specified. Available in wide range of contact forms, configurations and operations.

Specification

CONTACT RATING:	10 Amps @ 125VAC 4 Amps @ 28VDC
WIRES:	8" color coded 20 gauge stranded wire leads
DIMENSIONS:	2.75" (69.9) x 4.50" (114.3)
LED	12/24VDC .025A@28VDC
MATERIAL:	Stainless steel
FINISH:	Satin chrome (standard)

Ordering Information

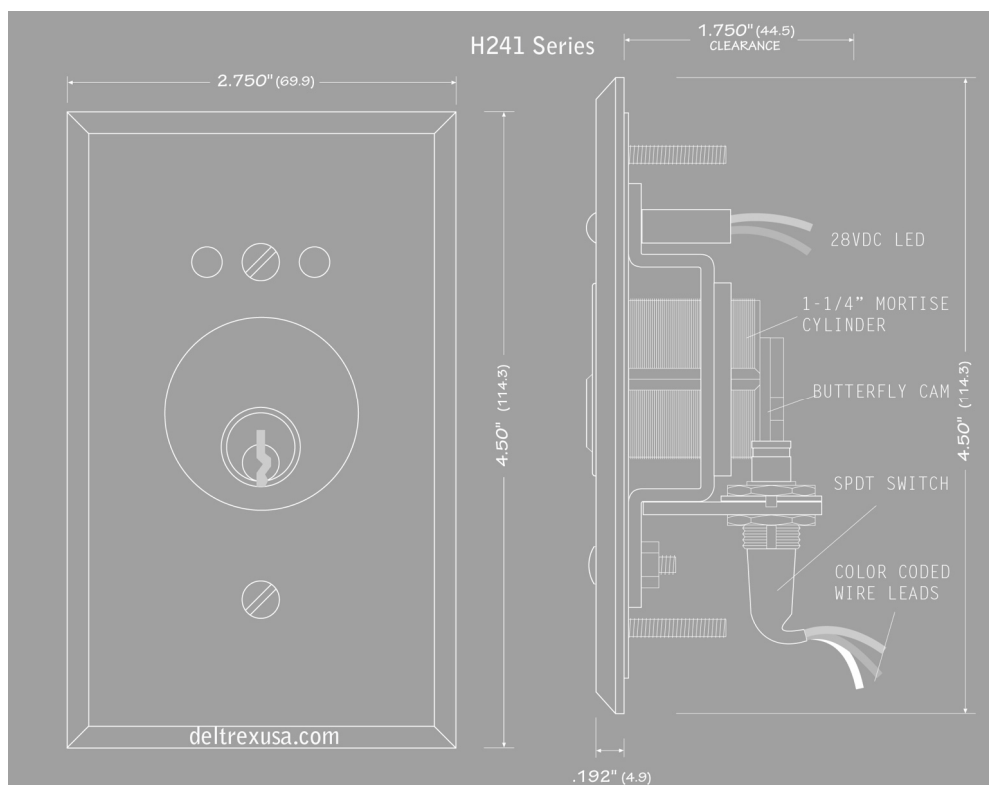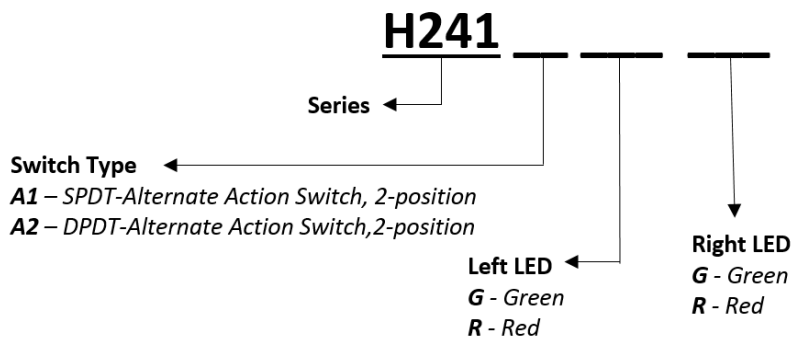

Push Plate Controls and Exit Releases

114 SERIES




114-AM10



114-YM10


114 SERIES Illuminated Push Button Control Assemblies with 1" diameter black flash guard. Multi-station assemblies on 2, 3, and 4-gang switch plates for up to eight stations.

Ordering Information

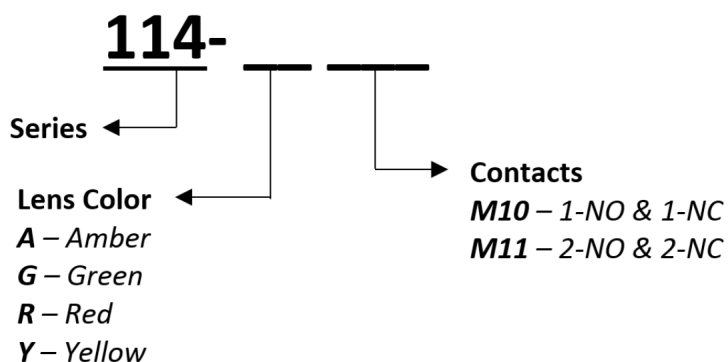

Specification

CONTACT RATING:	2 Amps @ 24VAC/DC
SWITCH TYPE:	SPDT-Momentary Switch (Standard) Furnished with 6" color coded 20-gauge stranded wire leads.
DIMENSIONS:	2.75"(69.9) x 4.50"(114.3)
MATERIAL:	Switch plate .060 stainless 302
FINISH:	Satin chrome (standard)

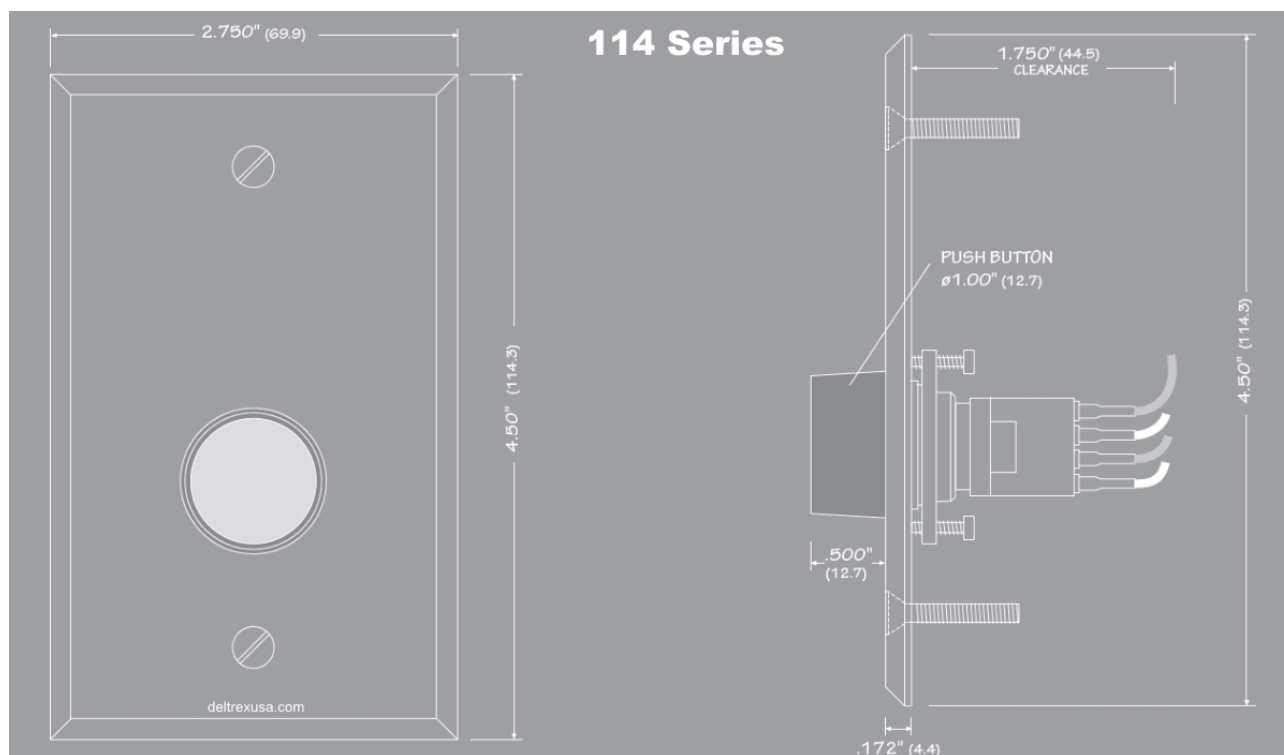

Push Plate Controls and Exit Releases


126 SERIES



126-M1LR


126 SERIES Coordinated snap-action momentary push button actuated station controls alone, in combination and with colored LEDs, furnished in two-piece clear anodized aluminum box with snap-on cover. These units are suitable for surface-mounting on wall or under desk or counter.

Ordering Information

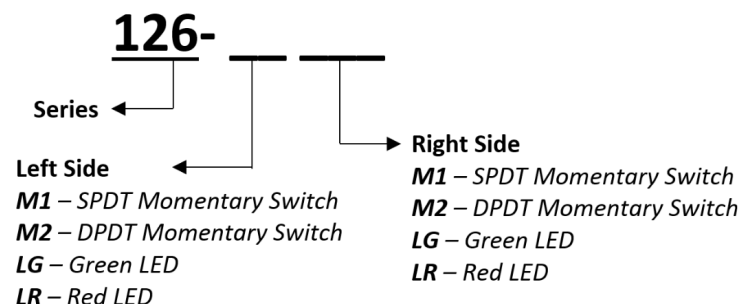

Specification

CONTACT RATING:	6 Amps @ 120VAC/28VDC
WIRES:	8" color coded 20 gauge stranded wire leads
LED:	Colored 28VDC.
DIMENSIONS:	3"(76.2) x 1"(25.4) x 2"(50.8)
MATERIAL:	Aluminum
FINISH:	Clear satin anodized aluminum (standard)
Mounting SCREWS:	#8 Type A sheet metal screws (3)

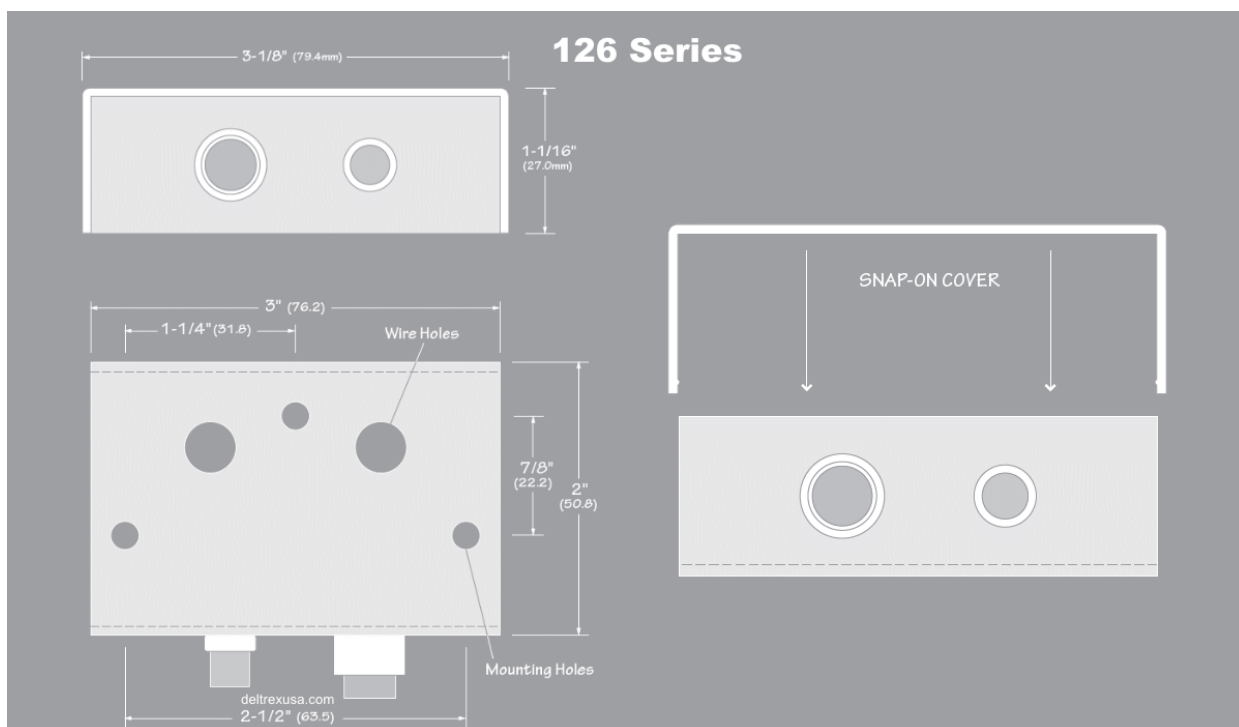


Push Plate Controls and Exit Releases

130 SERIES




130-GM1PCECE



130 SERIES Intermediate level non-illuminated square or rectangular push buttons with black shrouded colored cap on 1-gang box mount or 1.75"(44.5) wide switch plate for mullion mount.

Ordering Information

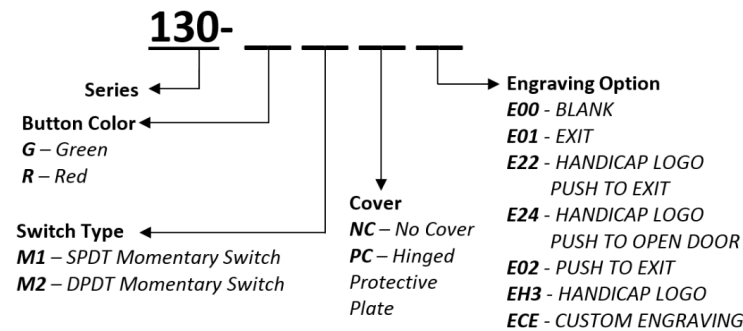


Specification

CONTACT RATING:	1 Amp @ 24VAC/DC
WIRES:	6" color coded 20-gauge stranded wire leads.
DIMENSIONS:	2.75"(69.9) x 4.50"(114.3)
MATERIAL:	Switch plate .060 stainless 302
FINISH:	Satin chrome (standard)




130 Series

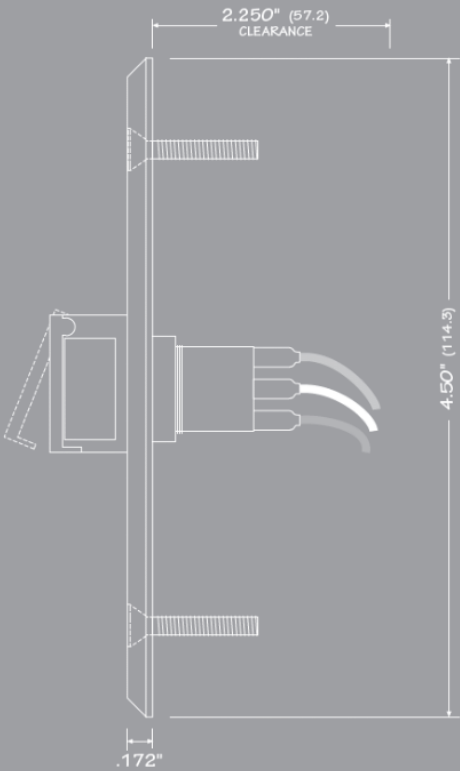

Push Plate Controls and Exit Releases

142-xLOC SERIES

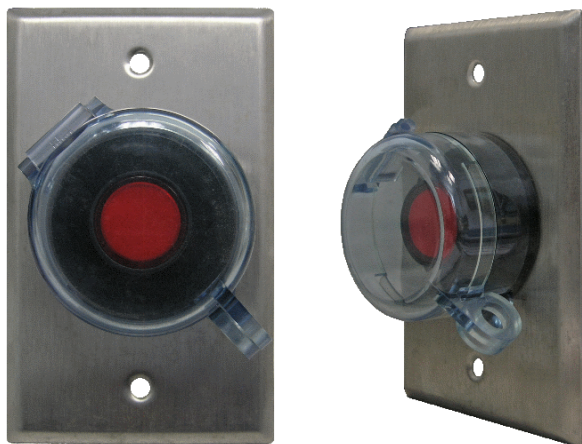

142-xLOC23R

142-xLOC SERIES Lock-Out cover assembly in tinted, see thru impact resilient plastic for use with 142 Series momentary and alternate action push button switches.

Ordering Information

142-xLOC

Series

Switch Type

22- 2 N.O.

23- 1 N.O. & 1 N.C.

33- 2 N.C.

Button Colors

B - BLACK

G - GREEN

R - RED

Specification


CONTACT RATING:	4 Amps @ 24VDC 6 Amps @ 120VAC
-----------------	--------------------------------

DIMENSIONS:	2.75"(69.9) x 4.50"(114.3)
-------------	----------------------------

MATERIAL:	Switch plate .060 stainless 302
-----------	---------------------------------

FINISH:	Satin chrome (standard)
---------	-------------------------

CONTACT RATING:	4 Amps @ 24VDC 6 Amps @ 120VAC
-----------------	--------------------------------

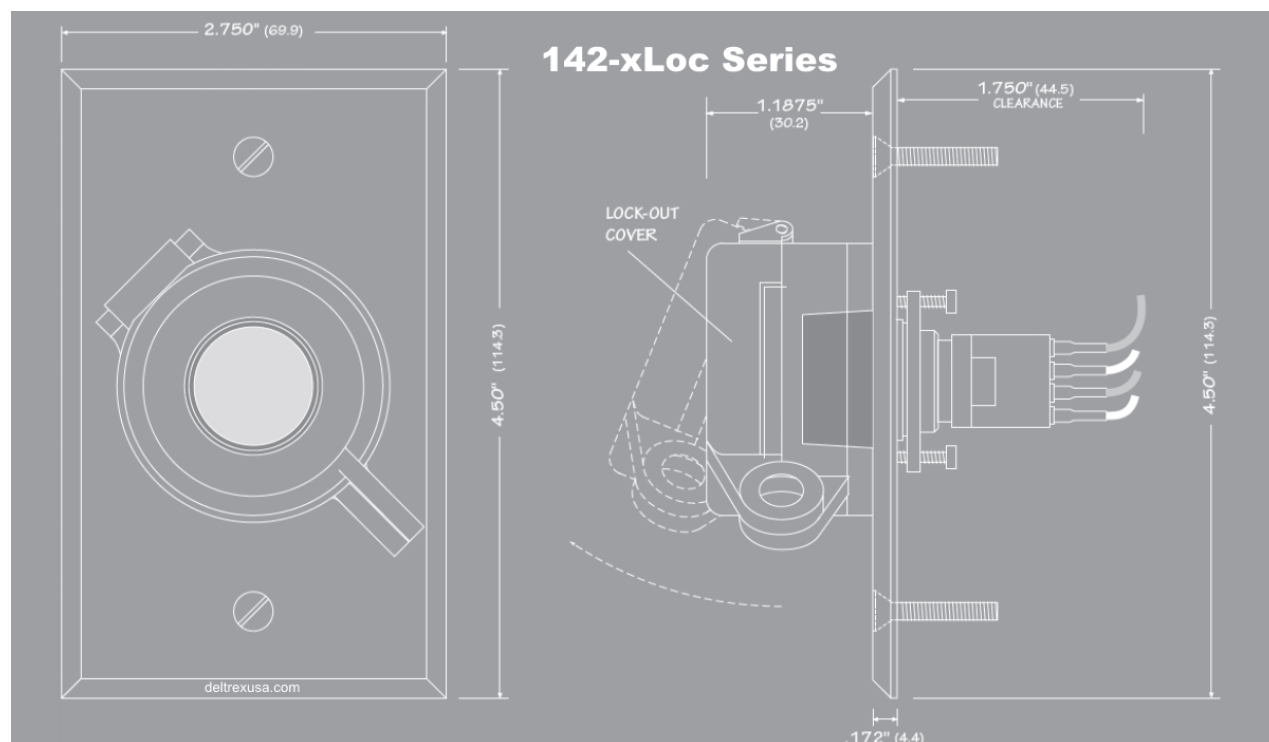

Anti-Vandal Duress & Emergency Call

H148 Series




H148 SERIES – Anti-vandal duress and emergency call buttons are flush mounted 9/16"(14.3) diameter stainless steel push buttons mounted on 1-gang box mount stainless steel plates.


H148-12E8L1

Ordering Information

Specification

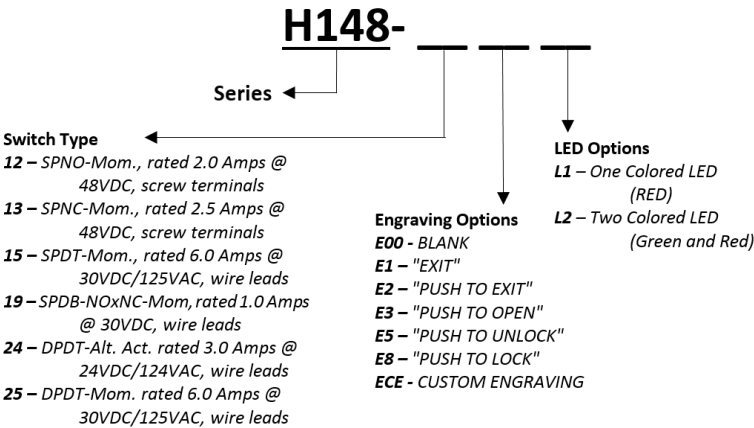

CONTACT RATING:	See ordering information below
BOX:	1-GANG BOX MOUNT
DIMENSIONS:	3.00"(76.2) x 4.50"(114.3)
MATERIAL:	11 gauge #304 stainless plate
Mounting Screws:	Tamper resistant spanner head (standard)

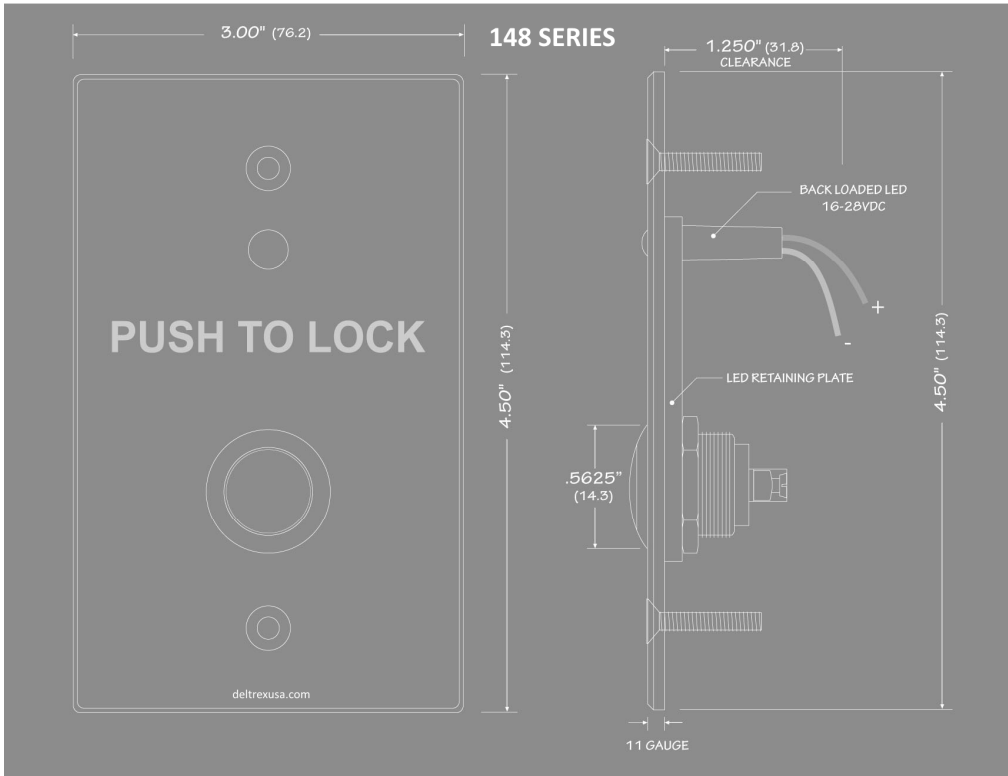

Push Plate Controls and Exit Releases


S106 SERIES



S106A-RDWHECE S106A-CABKECE


S106 SERIES Push Plate Control Assemblies consist of Narrow Security Push Plate on Back Plate with concealed preassembled socket head mounting screws for flush wall mounting. An impact resilient SPDT-Momentary switch is furnished standard. Alternate switches are available.

Ordering Information

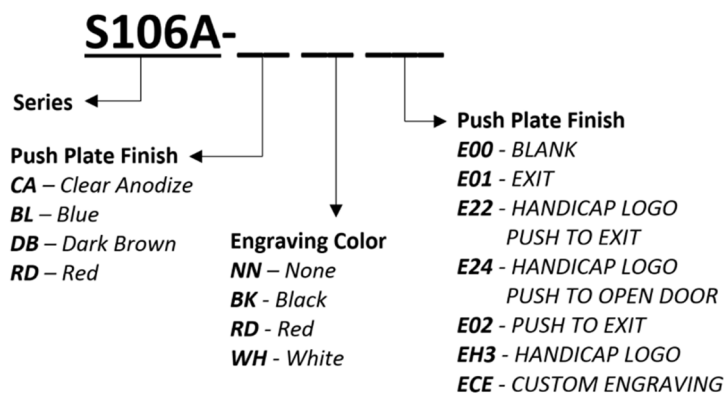

Specification


CONTACT RATING:	6 Amps @ 125VAC/28VDC
Switch Type:	SPDT-Momentary Switch (Standard)
DIMENSIONS:	Back Plate 4.50"(114.3) x 1.75"(44.5) Narrow Push Plate 4.00"(101.6) x 1.50"(38.1)
MATERIAL:	Aluminum
FINISH:	Clear anodized aluminum (standard)

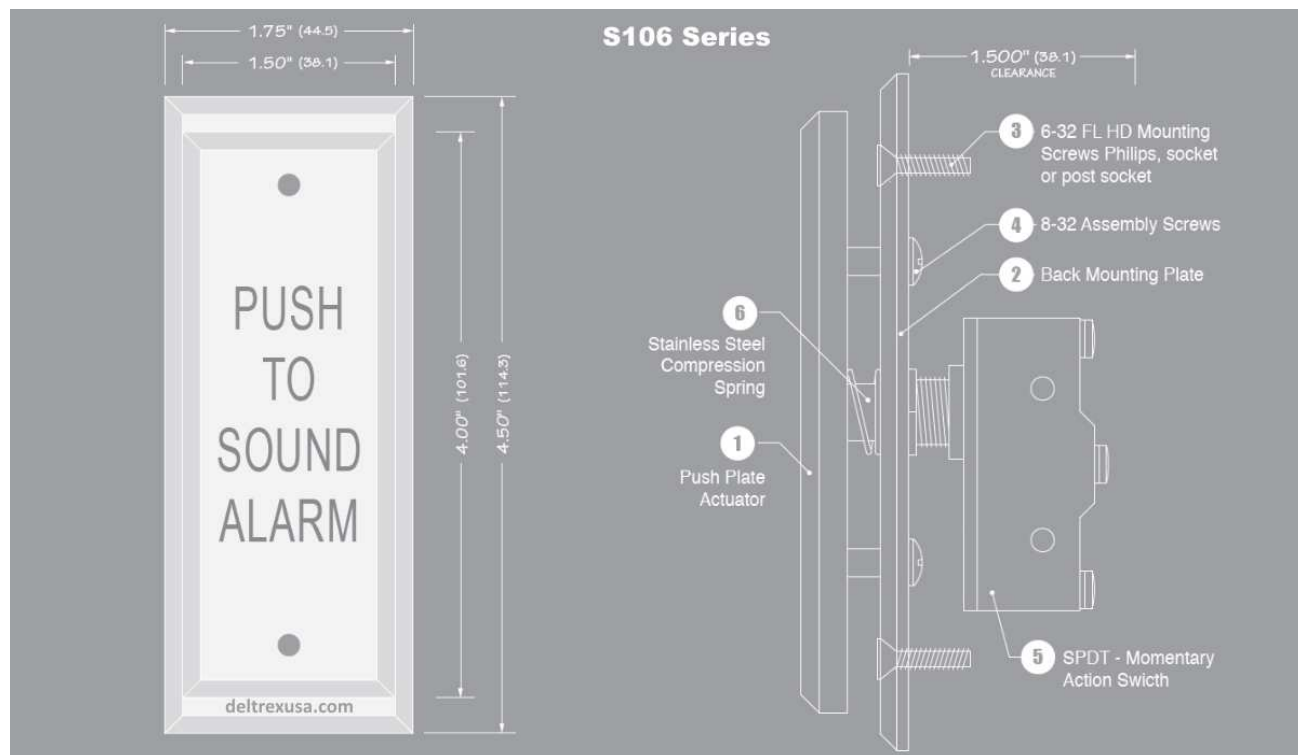

Visual Status Monitoring and Indicator Assemblies

326 Series

DeltrexUSA

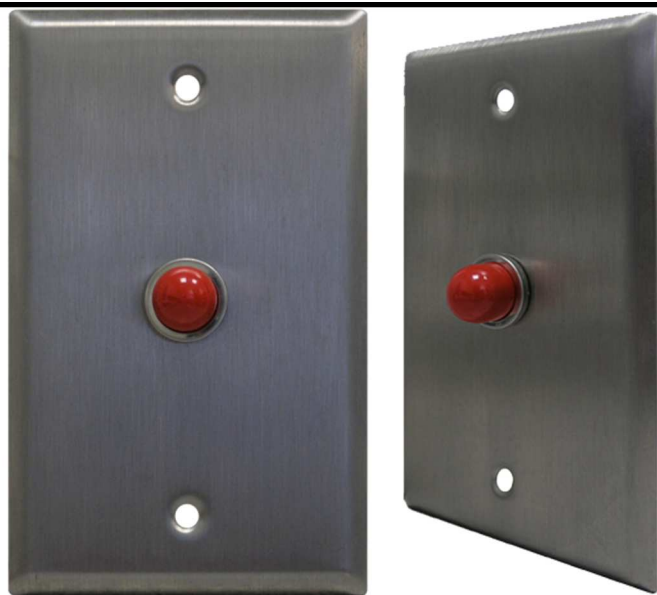

326 SERIES –. ½" diameter snap-in incandescent 28 Volt lamp with sealed colored dome lens and 4 ½" stranded wire leads on 1-gang box mount stainless steel switch plate.

Specification

CONTACT RATING:	28 Volt Incandescent Lamp Standard Current draw: .08 AMPS @ 28VAC/DC
WIRES:	4.5" long 22 gauge purple stranded wire leads.
LED:	Colored 28VDC.
DIMENSIONS:	2.75"(69.9) x 4.50"(114.3) narrow plate: 1.75" (44.5) x 4.50"(114.3)
MATERIAL:	Switch plate .060 stainless 302
FINISH:	Satin chrome (standard)

Ordering Information

