

#2755 Recessed security ANSI contact switch


Features:

- Power source: 12VDC/24VDC
- ANSI stainless steel door plate.
- UL Listed.
- Gap: up to 3/4" (19mm).
- 18" (500mm) jacketed cable lead.
- Easy install replaces standard.
- Rare Earth Magnet
- Epoxy sealed switch for long life and maximum resistance to harsh environments.
- Covert installation enhances resistance to tampering or compromise.
- Contact is factory calibrated for operation in steel and are not subject to sticking or freezing on seldom used doors. In addition, the #2755 contact is adjustable for use in loose fitting doors.



Country of origin: U.S.A.

Warranty: Lifetime warranty against workmanship, material and factory defects.

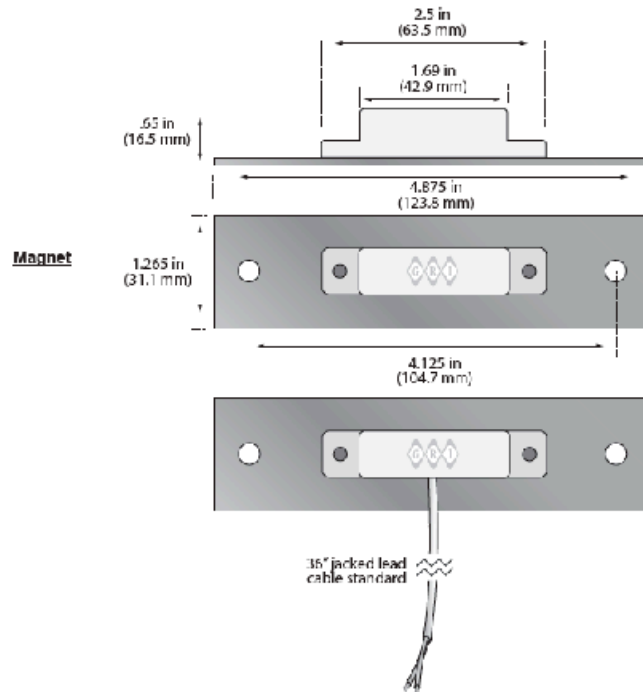

DeltrexUSA Products meet or exceed these minimum general specifications:

Part Number	Loop Type	Electrical Configuration	Reed Form	Max. Initial Contact Resistance (Ω)	Max. Contact Rating (W)	Max. Switching Voltage (VDC)	Max. Switching Current (A)
2755	Open/Closed	SPDT	C	.140	5	175	.250