


#542 TRANSFORMER

PRODUCT SPECIFICATIONS



- Input: 120 VAC
- Output: 24 VAC
- VA Rating: 40 VA
- Frequency: 50/60 Hz
- Circuit Protection: Inherently Limited
- Configuration: Split Bobbin, Open Frame Design with Welded Laminations and Enclosed Windings Foot Mounts
- Primary Connections: UL 1015 18 AWG Lead Wires, 8" Long, 0.375" ends Stripped and Tinned
- Secondary Connections: UL 1015 Insulated 18 AWG Lead Wires, 8" Long, 0.375" ends Stripped and Tinned
- Insulation System: UL 1446 Recognized Components Class B Insulation System PG125 (130° C, 266° F)
- Agency Approvals: UL 1585 / UL 5085-1 / UL 5085-3 for USA and Canada, Class 2 Transformer

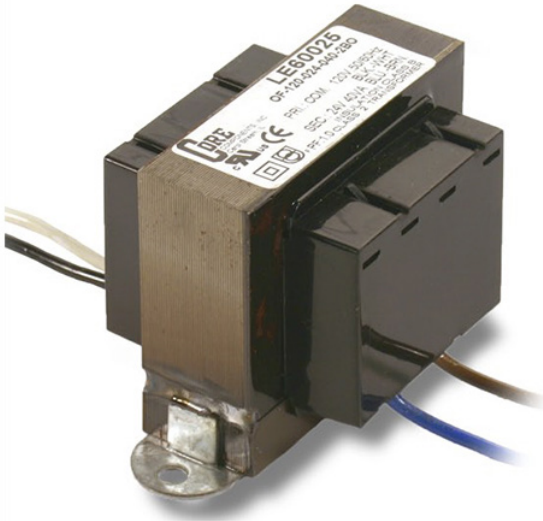