

F117



D117



#117 TOUCHLESS ACTUATOR

F117 - Touchless Actuator consisting of a 1-gang back plate.
D117 - Touchless Actuator consisting of a 2-gang back plate.

PRODUCT FEATURES

- Passive infrared exit switch
- Designed to reliably release magnetic locks
- Automatically cuts power to the lock, allowing the individual to exit without even realizing that the door is secured.

PRODUCT SPECIFICATIONS

D117 SWITCH PLATE: 4.00" x 4.00"

F117 SWITCH PLATE: 4.00" x 2.50"

- Infrared Out-Switch
- 5052 Marine-type aluminum
- Finish: Clear satin anodized aluminum (Standard)

FINISHES

CA: Aluminum
BK: Black
RD: Red
WH: White
GR: Green
CU: Custom Finish


ENGRAVING COLOR


RD: Red
BK: Black
GR: Green
WH: White
CU: Custom Color
CA: Aluminum



ENGRAVING OPTIONS

E00: No Engraving	E26: Wave to Open
E01: Exit	E27: Wave to Open w /HCP Logo
E04: Emergency	Logo E41: Request to Exit
E15: Emergency Door Release	EH2: HCP Logo
	ECE: Custom Engraving

F117

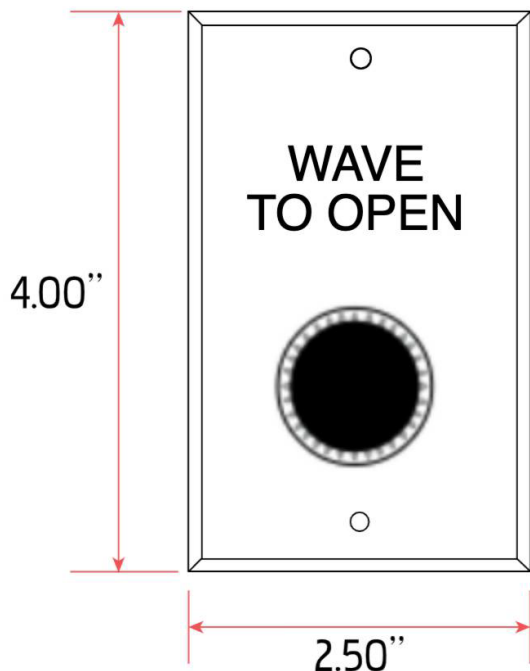

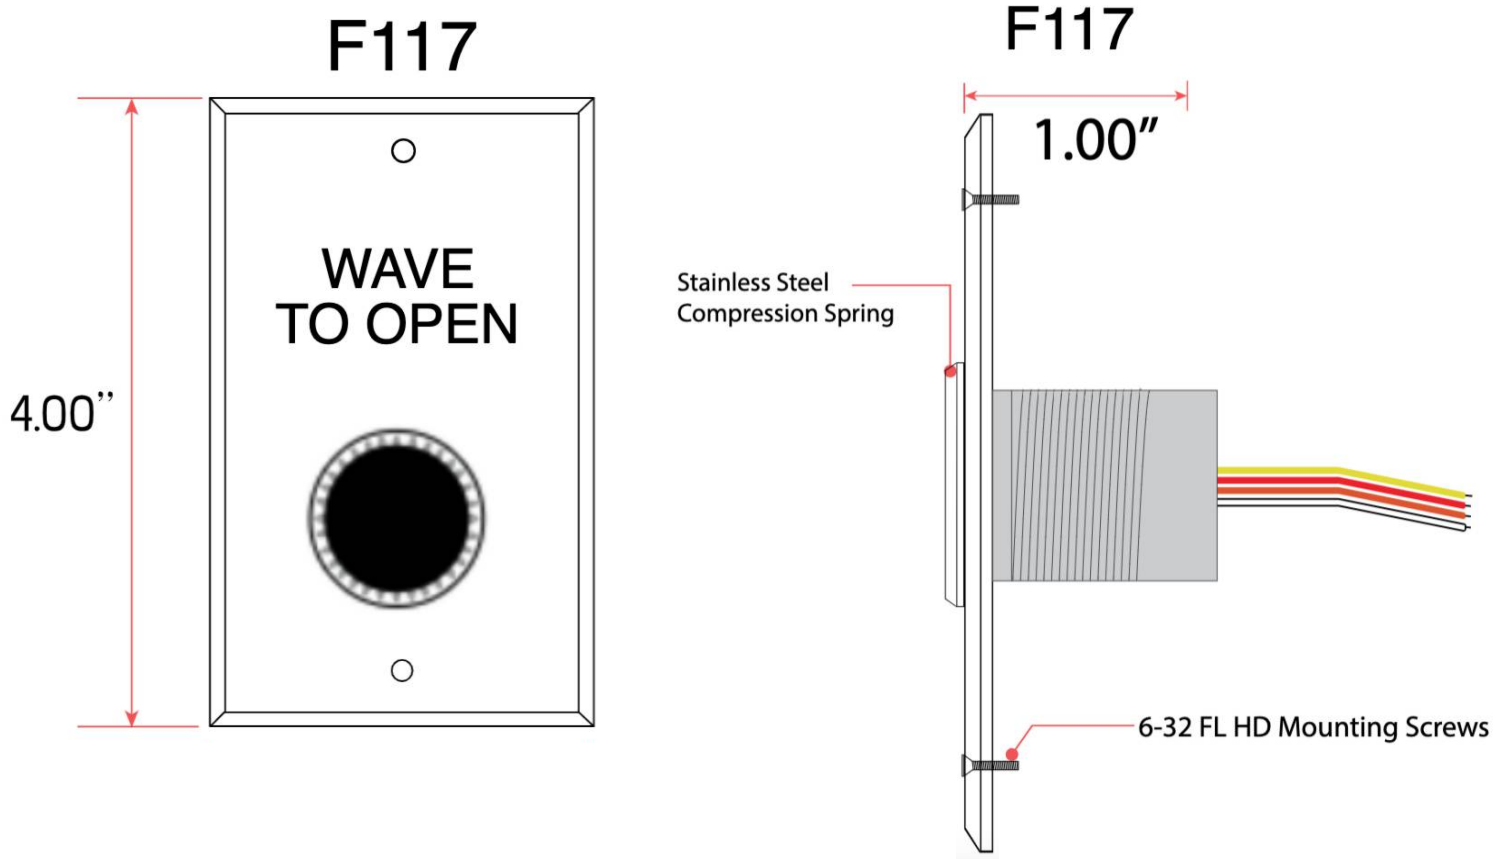


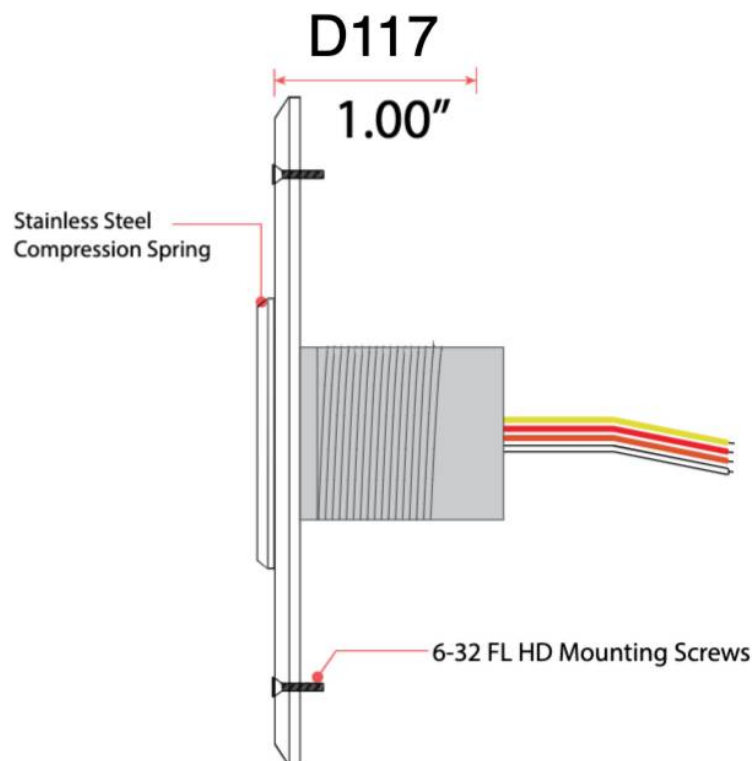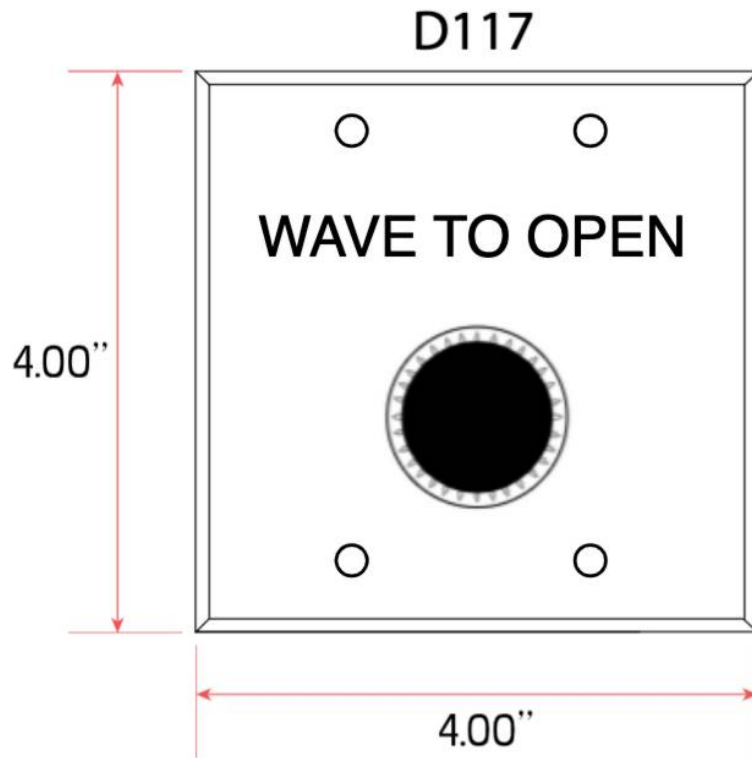


No Touch Sensor

#310, #117

Touchless Actuator

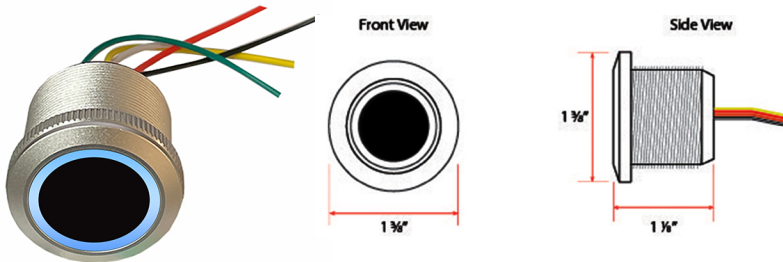

LED:

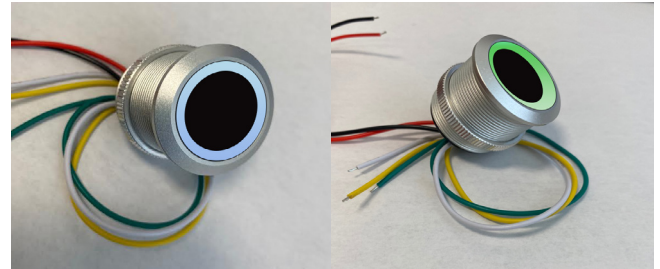

Technical Specifications:

Power: DC12-24V **Contact Rating: 3A/12~24V**

Output: NO/NC/COM Infrared distance: 3~15cm.

LED indicator: Blue LED indicator (standby)

Green LED indicator (sensation)

Panel: 0.9mm thick 304 stainless steel


Standard Structure: No touch to exit

Mechanical Life: 100,000 tested

Operating temp: -20~+55 Degree

Installation: Surface mount or Hollow door

Diagram Wiring:

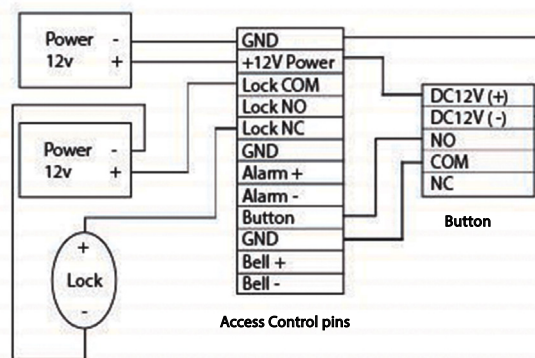

Red: +12~24VDC

Black: GND

Yellow: COM

White: NC

Green: NO