

F117



D117



#117 TOUCHLESS ACTUATOR

F117 - Touchless Actuator consisting of a 1-gang back plate.
D117 - Touchless Actuator consisting of a 2-gang back plate.

PRODUCT FEATURES

- Passive infrared exit switch
- Designed to reliably release magnetic locks
- Automatically cuts power to the lock, allowing the individual to exit without even realizing that the door is secured.

PRODUCT SPECIFICATIONS

D117 SWITCH PLATE: 4.00" x 4.00"

F117 SWITCH PLATE: 4.00" x 2.50"

- Infrared Out-Switch
- 5052 Marine-type aluminum
- Finish: Clear satin anodized aluminum (Standard)

FINISHES

CA: Clear Anodized
DB: Dark Brown
WH: Off White
RD: Red
BL: Hospital Blue
CU: Custom Finish


ENGRAVING COLOR

RD: Red
BK: Black
GD: Gold
WH: White
CU: Custom Color


ENGRAVING OPTIONS

E00: No Engraving	E11: Push to Sound Alarm
E01: Exit	E15: Emergency Door Release
E02: Push to Exit	E22: Push to Exit w/ HCP Logo
E03: Push to Open	E24: Push to Open Door w/ HCP Logo
E04: Emergency	E32: Push to Operate Door w/ HCP Logo
E07: Push for Help	E41: Request to Exit
E08: Push to Lock	EH2: HCP Logo
E09: Push to Unlock Gate	ECE: Custom Engraving


F117-12VDC

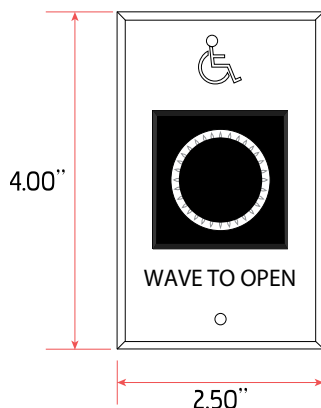


F117-24VDC

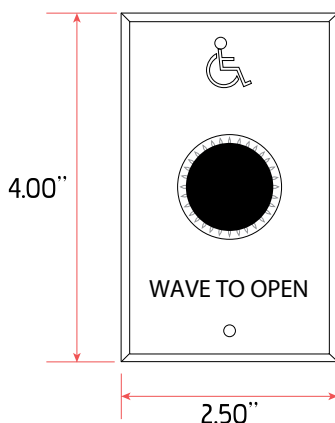


F117-12VDC

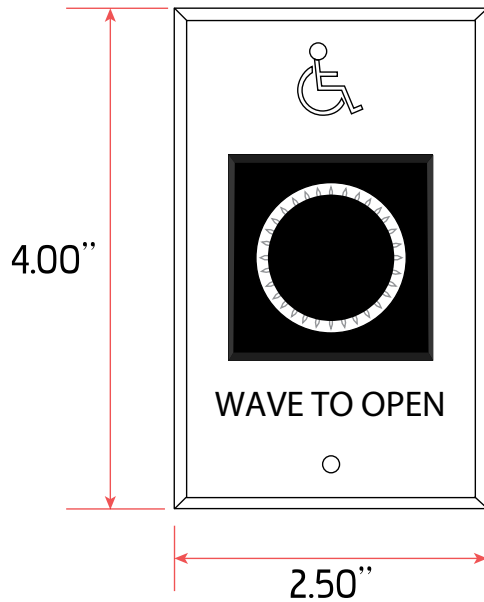


F117-24VDC

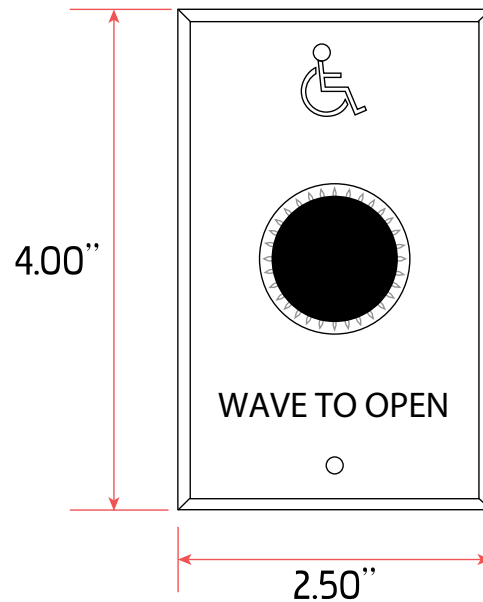

F117-12VDC

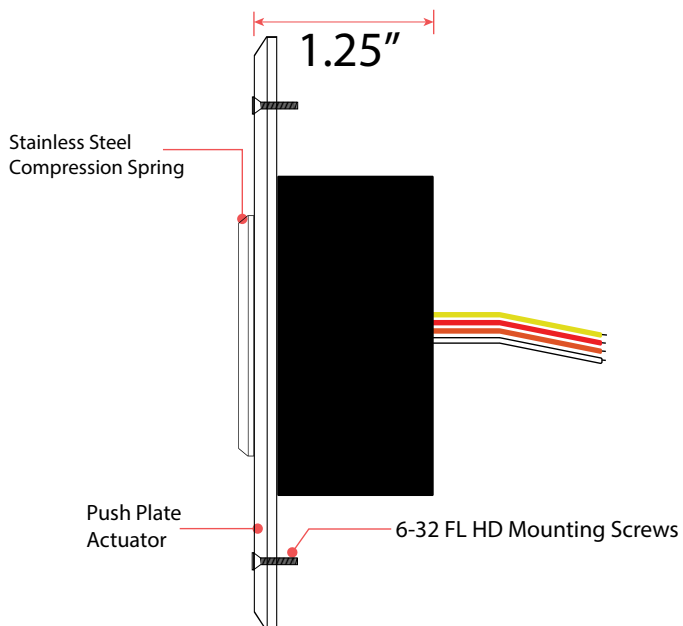




F117-24VDC

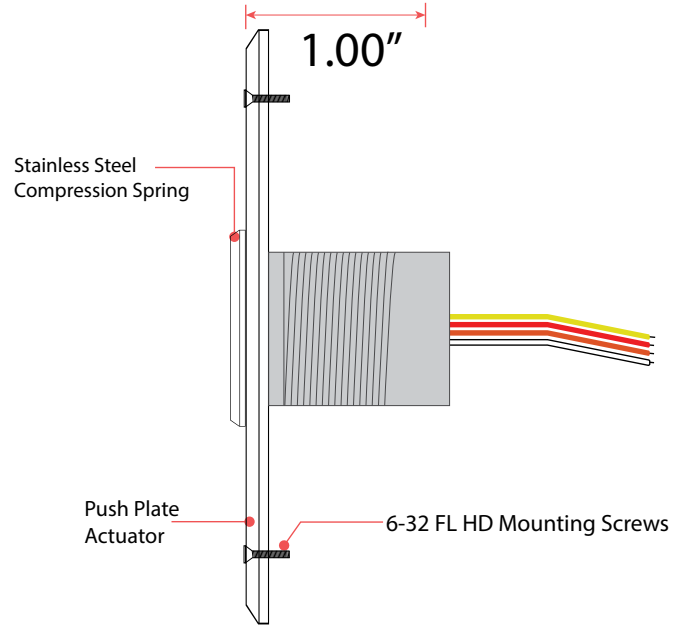





Intelligent Access Control Solutions
& Custom Push Plate Switch Controls

415 Concord Ave. Bronx, NY 10455 • DeltrexUSA.com • contact@deltrexusa.com

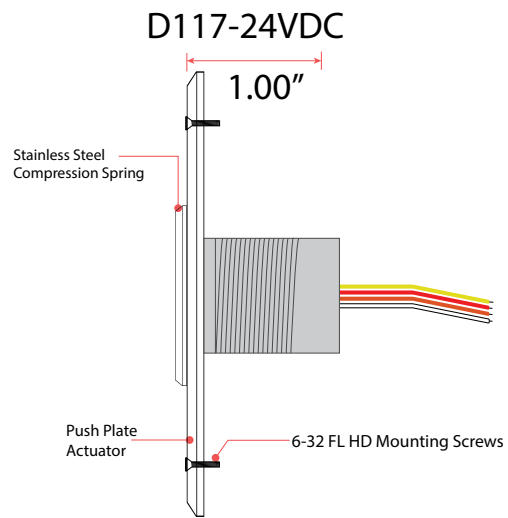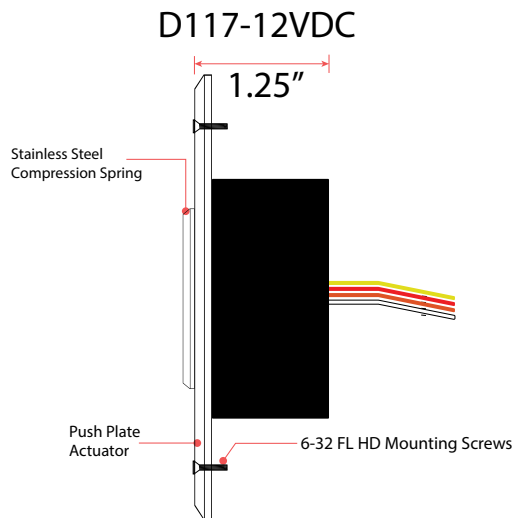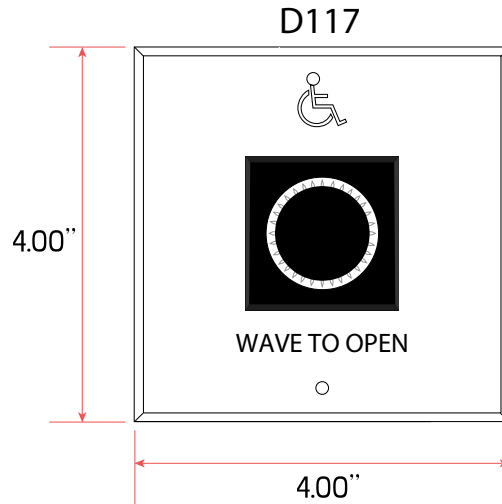


No Touch Sensor

#310 Touchless Actuator



LED:

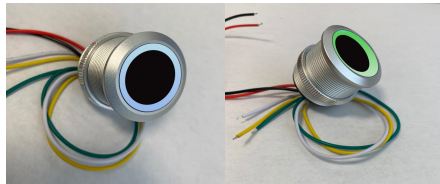

Technical Specifications:

Power: DC12-24V Contact Rating: 3A/12~24V

Output: NO/NC/COM Infrared distance: 3~15cm.

LED indicator: Blue LED indicator (standby)

Green LED indicator (sensation)

Panel: 0.9mm thick 304 stainless steel


Standard Structure: No touch to exit

Mechanical Life: 100,000 tested

Operating temp: -20~+55 Degree

Installation: Surface mount or Hollow door

Diagram Wiring:

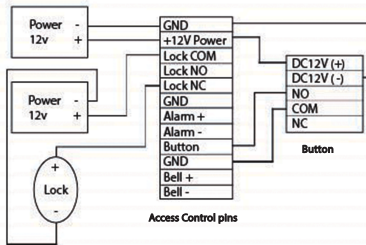

Red: +12~24VDC
Black: GND
Yellow: COM
White: NC
Green: NO